

Hot Water, Efficiently



Heat Pump

190L | 250L | 300L

Residential Warranty



7 Years
on cylinder




5 Years
on compressor



2 Years
workmanship warranty

Make savings appear out of thin air with a Smart Lifestyle Australia Heat Pump

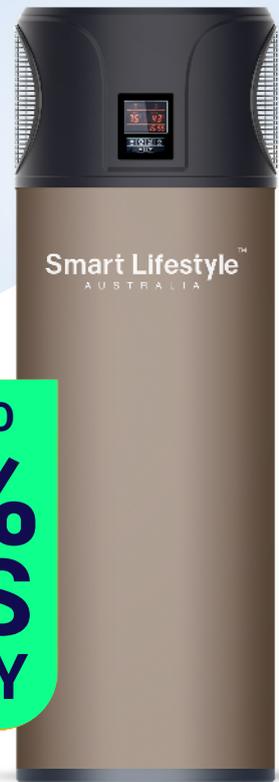


USES UP TO
**80%
LESS
ENERGY**

FEATURES



Modern & Stylish

A stylish slim line single piece unit incorporates a top-mounted compressor with compact footprint



Highly Efficient

Produces significantly more heat energy than the power input; saving on purchased energy



Handy Controller

Providing intuitive operation & helpful functions such as temp setting, timer & safety lock



Built-in Frost Protection

Protecting the condenser from icing for complete peace of mind

Harvest the free energy with the advanced Smart Lifestyle Australia heat pump.

This renewable energy water heating technology uses up to 80% less energy than a conventional water heater, whilst providing reliable hot water all day and night.

Smart Technology

Heat pumps utilise an ingenious technology to efficiently transfer thermal energy directly from the surrounding air and into the water, and so do not rely on direct sun or fossil fuels to provide an energy source.

AIR Heat Pump extracts around 3kW from surrounding air.

1kW
Power Input



5kW
Energy Into Water Heating


Did you know?

A heat pump is like an energy multiplier. From 1 kW of power input, it can create over 4 kW's of output heat². That's a performance efficiency of a remarkable 400%. Whereas conventional electric storage water heaters can only convert 1 kW of input power into a maximum of 1 kW of output heat.

Energy Efficiency

Did you know?

Water heating accounts for nearly a quarter of the energy use and greenhouse gas emissions in the average Australian home.

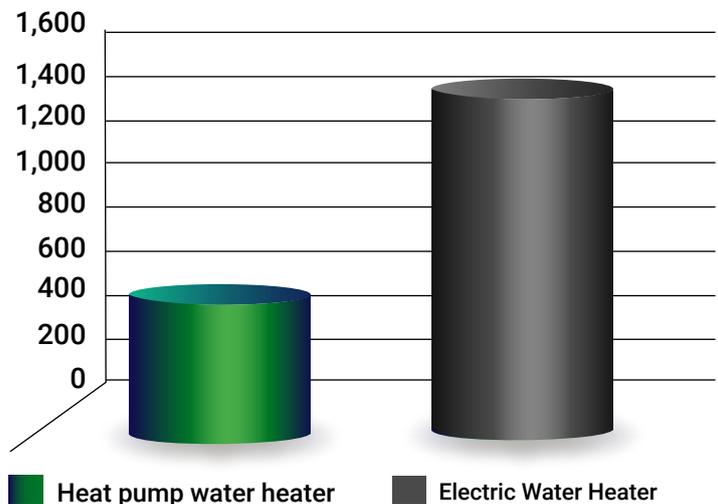

**Estimations based on SLA-R18-300D/N3A4 in zone 3 under medium load, obtained from independent laboratory test results and followed by TRNSYS modeling and a retail electricity cost of \$0.30c per kWh.*



Model
SLA-R18-190D/N3A4
1-2 BEDROOMS
190L CAPACITY

Model
SLA-R18-300D/N3A4
4+ BEDROOMS
300L CAPACITY

Model
SLA-R20-250/N3A4
1-3 BEDROOMS
250L CAPACITY



Smart Technology

With a Smart Lifestyle Australia heat pump, set up and operation monitoring is made simple thanks to an amazing, in built user-friendly controller.

Operational modes

ECO (Heat Pump Only) mode: The standard mode where the highest efficiency is achieved

Hybrid Mode: The Heat Pump & E-heater operate together to ensure the set temperature is achieved.

E-Heater: When the air temperature drops to below -7°C, the heat pump will automatically select E-heater mode for an electric hot water boost



Wide Operating Range

Operates as low as 5°C in ECO mode & between -20°C & 45°C with additional E-heat boost



Tank-Wrapped Condenser Coil

For efficient heat transfer & preventing water contamination



Auto Disinfection

Providing intuitive operation & helpful functions such as temp setting, timer & safety lock




Power Outage Memory

Protecting the condenser from icing for complete peace of mind



Low Operating Noise

Operating at a very low 48-58 dB(A) you will hardly know it's there!

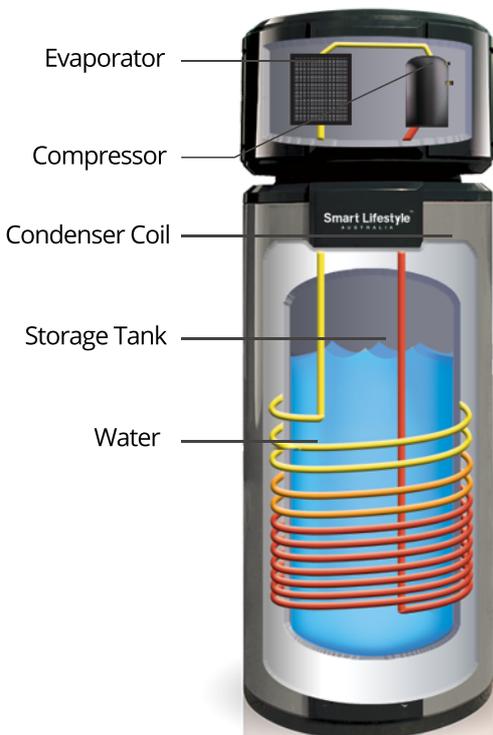

How it Works

1. A fan draws in air, containing heat energy, across the evaporator
2. The evaporator turns the liquid refrigerant into a gas
3. The compressor pressurises the refrigerant into a hot gas
4. The hot gas inside the condenser coil heats the water inside the coil-wrapped tank
5. The refrigerant reverts back to a liquid after heating the water and continues to the evaporator for the process to start again

An energy efficient hot water system such as the Smart Lifestyle Australia heat pump is a great way for households to make substantial reductions in their energy consumption and cost of living.

A heat pump provides a quick and easy replacement of your old energy-hungry electric water heater, whilst also reducing CO2 emissions by over 4 tonnes, and saving you up to \$900* per year.

Product Specifications

MODEL		Unit	SLA-R18-190D/N3A4	SLA-R20-250/N3A4
Power supply			220-240V~, 1Ph, 50Hz	220-240V~, 1 Ph, 50Hz
Nominal tank volume		L	193	250
Heating capacity (Heat pump only)		kW	1.7	2
EBH (Electric backup heater)		kW	2.0	1.5
Input (Heat pump only)		W	465	600
COP			3.65	3.7
Current (Heat pump only)		A	1.94	2.7
Max.leaving water temperature (Heat pump only)		°C	60	60
Hot water yield		L/h	36	40
Working ambient temperature (Heat pump only)			-7°C to 40°C	-7°C to 43°C
Sound pressure level		dB(A)	48 - 58	48 - 58
Water resistance			IP×4	IP×4
Refrigerant type			R134a	R134a
Throttling type			Electric expansion valve	Electric expansion valve
Compressor	Brand		GMCC	HIGHLY
	Type		Rotary	Rotary
Evaporator	Fin		Hydrophilic aluminum	Hydrophilic aluminum
	Tube		Inner groove copper tube	Inner groove copper tube
Fan motor	Speed	rpm	1,200	950
	Fan Type		Axial	Axial fan
Low pressure protection			Yes	0.7Mpa
High pressure protection			Yes	2.7MPa
Inner tank			Enamel	Enamel
Inlet water pipe connection		mm	G3/4	G3/4
Outlet water pipe connection		mm	G3/4	G3/4
Condensing water connection		mm	1/2", internal thread	G1/2
Unit dimension (ΦD×H)		mm	Φ510×2175	Φ570×2140
Packing dimension (L×W×H)		mm	590×610×2,360	710×680×2350
Net / Gross weight		kg	93.5 / 102.5	125/150

Note: The specification may be changed for product improvement, please refer to the nameplate of product.

Condition - Ambient: 19°C DB/15°C WB, initial water temperature is 14°C, ending water temperature is 55°C.

Model No		SLA-R18-190D/N3A4					SLA-R20-250/N3A4				
Certificate type	Activity	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
VEECs Metro	1D Elec	-	-	-	12	11	-	-	-	12	11
	3C Gas	-	-	-	7	7	-	-	-	7	6
VEECs Regional	1D Elec	-	-	-	13	12	-	-	-	12	11
	3C Gas	-	-	-	7	7	-	-	-	7	6
ESCs Metro	D17 Elec	-	-	43	-	40	-	-	43	-	40
	D19 Gas	-	-	22	-	19	-	-	22	-	19
ESCs Regional	D17 Elec	-	-	44	-	41	-	-	44	-	41
	D19 Gas	-	-	22	-	19	-	-	22	-	18
STCs	7-year	17	16	21	21	21	17	16	21	22	21

****All the above calculation are tentative**

**Eligible for
Government
Incentives**

The highly energy efficient Smart Lifestyle Australia hot water heat pumps qualifies to generate Small-scale Technology Certificates (STCs) under the Federal Government RET scheme and so Australian consumers can use these to reduce the point of sale price of their heat pump.

Product Specifications

MODEL		Unit	SLA-R25-300D/N3D4	SLA-R25-300D/N3D4C
Power supply			220-240V~, 1Ph, 50Hz	220-240V~, 1Ph, 50Hz
Nominal tank volume		L	290	290
Heating capacity (Heat pump only)		kW	2.5	2.5
EBH (Electric backup heater)		kW	2.0	2.0
Input (Heat pump only)		W	610	610
COP			4.10	4.10
Current (Heat pump only)		A	2.54	2.54
Max.leaving water temperature (Heat pump only)		°C	60	60
Hot water yield		L/h	52	52
Working ambient temperature (Heat pump only)			-7°C to 40°C	-7°C to 40°C
Sound pressure level		dB(A)	48 - 58	48 - 58
Water resistance			IP×4	IP×4
Refrigerant type			R134a	R134a
Throttling type			Electric expansion valve	Electric expansion valve
Compressor	Brand		Panasonic	Panasonic
	Type		Rotary	Rotary
Evaporator	Fin		Hydrophilic aluminum	Hydrophilic aluminum
	Tube		Inner groove copper tube	Inner groove copper tube
Fan motor	Speed	rpm	850	850
	Fan Type		Axial	Axial
Low pressure protection			Yes	Yes
High pressure protection			Yes	Yes
Inner tank			Enamel	Enamel
Inlet water pipe connection		mm	G3/4	G3/4
Outlet water pipe connection		mm	G3/4	G3/4
Condensing water connection		mm	1/2", internal thread	1/2", internal thread
Unit dimension (ΦD×H)		mm	Φ640×2,010	Φ640×2,011
Packing dimension (L×W×H)		mm	750×745×2,210	750×745×2,211
Net / Gross weight		kg	130 / 144	131 / 144

Note: The specification may be changed for product improvement, please refer to the nameplate of product.

Condition - Ambient: 19°C DB/15°C WB, initial water temperature is 14°C, ending water temperature is 55°C.

Model No	SLA-R25-300D/N3D4						SLA-R25-300D/N3D4C					
	Certificate type	Activity	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	Activity	Zone 1	Zone 2	Zone 3	Zone 4
VEECs Metro	1D Elec	-	-	-	12	11	44A(i) Gas	-	-	-	10	7
	3C Gas	-	-	-	7	6	44A(ii) Elec	-	-	-	26	21
	-	-	-	-	-	-	44A(iii) New	-	-	-	8	6
VEECs Regional	1D Elec	-	-	-	13	12	44A(i) Gas	-	-	-	9	6
	3C Gas	-	-	-	7	6	44A(ii) Elec	-	-	-	28	22
	-	-	-	-	-	-	44A(iii) New	-	-	-	8	5
ESCs Metro	D17 Elec	-	-	43	-	40	F16 Gas	-	-	19	-	8
	D19 Gas	-	-	22	-	19	F16 Elec	-	-	88	-	62
	-	-	-	-	-	-	F17	-	-	15	-	5
ESCs Regional	D17 Elec	-	-	44	-	41	F16 Gas	-	-	18	-	7
	D19 Gas	-	-	22	-	18	F16 Elec	-	-	91	-	64
	-	-	-	-	-	-	F17	-	-	14	-	4
STCs	7-year	17	17	21	22	21	STCs	16	16	19	21	19

****All the above calculation are tentative**

**Eligible for
Government
Incentives**

The highly energy efficient Smart Lifestyle Australia hot water heat pumps qualifies to generate Small-scale Technology Certificates (STCs) under the Federal Government RET scheme and so Australian consumers can use these to reduce the point of sale price of their heat pump.



- Ph: 1300 198 955 ■ ABN 54 652 113 561
- info@smartlifestyleaustralia.com.au
- smartlifestyleaustralia.com.au

Office Address

- Unit 1, 41 Anzac St, Greenacre, NSW 2190
- 16 Fastline Road Truganina VIC 3029